




Series SC74	
Size Range	50mm~1000mm (2"~40")
Body Style	Wafer
Temperature Range	-59°C~560°C
Pressure Range	1.0Mpa~6.3Mpa(Class150~600)
Body Materials	WCB, LCC, LC1, WC6, CF8, CF8M, 321, 316Ti
Disc Materials	WCB, LCC, LC1, WC6, CF8, CF8M, 321, 316Ti
Stem Materials	420, F6a, F304, F316
Seat Materials	420, Stellite alloy, Hastelloy, Inconel, Monel, Viton
Installation Direction	Unidirectional
Face to Face	JB/T8937
Design	JB/T8937
Flange Drilling	ASME B16.5, EN1092, GOST33259
Top connection	None
Inspection	GB/T13927, ISO5028, API598, JB/T9092

SC74
Wafer Swing Check Valve

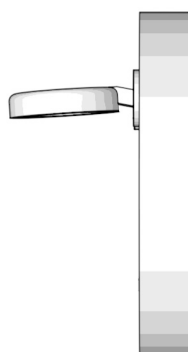

S	C(Type)	x(Driving)	7(Connection)	4(Structure)	S(Sealing material)	-	16(Pressure)	C(Body material)
Seallon	C-check valve	x-none	7-wafer	4-swing	R-rubber	-	10	C-cast steel
					P-PTFE	-	16	S-stainless steel
					S-stainless steel	-	25	
						-	40	
						-	63	



DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000
L (F-F, PN10~PN16 mm)	15	15	16	16	17	19	26	29	38	38	48	48	58	68	70	75	75	90
L (F-F, PN25~PN40 mm)	19	19	19	19	19	29	29	38	51	45	55	60	70	78	80	95	95	100
Weight (kg)	1.2	1.6	2.2	2.7	5	6	14	17.5	27	42	60	74	116	178				