

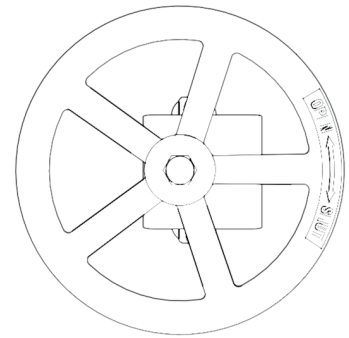


**SG73-A**  
Wafer Knife Gate Valve Type A

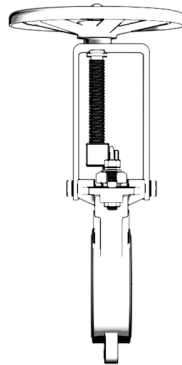

Series SG73-A	
Size Range	50mm~1600mm (2"~64")
Body Style	Wafer
Temperature Range	-20°C~150°C
Pressure Range	0.6MPa~1.6 MPa(Class150)
Body Materials	GGG40, CF8, CF8M, 321, 316Ti, 904L, 310S
Disc Materials	304, 316, 316L, 321, 316Ti, 904L, 310S, Duplex
Stem Materials	420, 431, 304, 316, 316L, 321
Seat Materials	EPDM, NBR, NR, SBR, Viton, MVQ
Installation Direction	Bidirectional
Face to Face	GB/T15188
Design	JB/T8691
Flange Drilling	ASME B16.5, EN1092, GOST33259, DIN2501
Top connection	ISO5211, GOST55510
Inspection	GB/T13927, ISO5028, API598, JB/T9092

S	G(Type)	x(Driving)	7(Connection)	3(Structure)	R(Sealing material)	-	10(Pressure)	D(Body material)
Seallon	G-gate valve	x-handwheel 0-yoke 5-gear box 6-pneumatic 9-electric	7-wafer	3-knife gate	R-rubber	-	10 16	D-ductile iron S-stainless steel

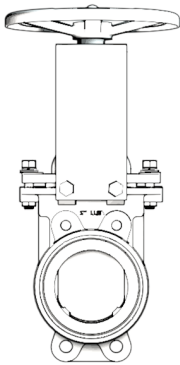

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800	900	1000	1200	1400	1600	
L (F-F, mm)	48	48	51	51	57	57	60	70	76	76	89	89	114	114	127	127	127	149	156	160	160	
Torque (1.0Mpa)	39	55	65	70	77	116	130	133	150	154	215	231	327	347	462	693	892	923	1385			
Bare stem weight (kg)	7	8	10	13	18	23	30	51	63	87	117	147	231	318	520	840	910	1065	2065	3900	4190	