




Series SGL41-B	
Size Range	15mm~400mm (1/2"~16")
Body Style	Flanged
Temperature Range	-46°C~650°C
Pressure Range	1.0Mpa~4.0Mpa (Class150~300)
Body Materials	WCB, LCC, WC6, CF8, CF8M, 321, 316Ti
Disc Materials	WCB, LCC, WC6, CF8, CF8M, 321, 316Ti
Stem Materials	420, 35CrMoA, F6a, F11, F304, F316, F321
Seat Materials	420, Stellite alloy, Hastelloy, Inconel, Monel
Installation Direction	Unidirectional
Face to Face	GB/T12221, ASME B16.10, DIN3202
Design	GB/T12235, BS1873, DIN3356
Flange Drilling	ASME B16.5, EN1092, GOST33259, DIN2543-2545
Top connection	ISO5211, GOST55510
Inspection	GB/T13927, ISO5028, API598, JB/T9092, DIN3230

**SGL41-B**  
Flanged Bellows Globe Valve

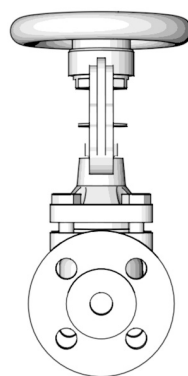

S	GL(Type)	×(Driving)	4(Connection)	1(Structure)	S(Sealing material)	-	16(Pressure)	C(Body material)
Seallon	GL-globe valve	×-handwheel	4-flanged	1-pass through	S-stainless steel	-	10	C-cast steel
		0-yoke					16	S-stainless steel
		5-gear box					25	
		6-pneumatic					40	
		9-electric						

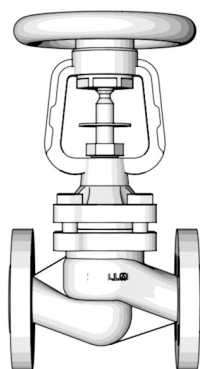

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L (F-F DIN3202 F1, mm)	130	150	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
L (F-F 150LB, mm)	108	117	127	140	165	203	216	241	292	356	406	495	622	698	787	914
L (F-F 300LB, mm)	152	178	203	216	229	267	292	318	356	400	444	559	622	711	762	864
L (F-F 600LB, mm)	165	190	216	229	241	292	330	356	432	508	559	660	787	838	889	991
L (F-F 900LB, mm)		229	254	279	305	368	419	381	457	559	610	737	838	965	1029	1130
Torque (1.6Mpa)	24	24	24	24	24	38	48	79	98	161	245	313	692	923	1385	1920
Bare stem weight (kg)	4	5	6	7	10	13	17	24	34	52	80	132	230	340	475	670